

# TV/SAT

## Television and Satellite

### PRODUCT DESCRIPTION

The TV/SAT range is a High quality and High Level Protection device for TV Antennas and Satellite Dishes/Decoders. The TV/SAT Range includes proprietary circuitry that checks the wiring of the socket it is plugged into and simultaneously checks for a good earthing of the premises that is required for any surge protector to be effective.

Status Indicators:



If the tick light is **ON**, then the surge protector is working and okay, but if it is **OFF**, then surge protector needs to be replaced



**WARNING!**  
When the cross light is **ON**, the the wiring of the wall socket the surge protector is plugged into is faulty



### PRODUCT PHOTO



### FEATURES AND BENEFITS


- Flame retardant - prevention from burning and causing of a fire
- Guaranteed - You won't need to buy another one in 2 years
- Insured - Your attached equipment is insured against lightning surge damage for 24 months (T&Cs Apply)

### PRODUCT TECHNICAL DATA

Specifications	Ratings	Differential Mode	Common Mode
<b>POWER:</b> Operating Voltage	220Vac 16Amp		
Is (discharge current)		16000Amps	16000Amps
Vclamping	600V		
ts (Response Time)	10ns		
<b>ANTENNA:</b> Is (discharge current)		10000 Amps	10000 Amps
ts (Response Time)	10ns		
	<b>TV</b>	<b>SAT</b>	
Data Speed	800mHz	1600mHz	
Connections	BNC	F-type	
Vclamping	<90V	<90V	
<b>GENERAL:</b> Guarantee	Yes, 24 months		
Insured Warranty	Attached Equipment Warranty up to a max of R20 000. T's and C's apply		
Standards	SABS, NRCS, CSIR, TEST AFRICA		
Uses	Electrical equipment that plugs into a SA 220Vac 16 Amp round socket outlet and connects to TV Antenna and/or Satellite decoder's F-connectors		
Installation	Plug n Play		

### How to connect your plug:

Connect the TV aerial cable/satellite cable to the surge protector. Connect the TV aerial cable to the TV and to the surge protector. Connect satellite cable to decoder and the surge protector. Plug the surge protector into the wall socket.

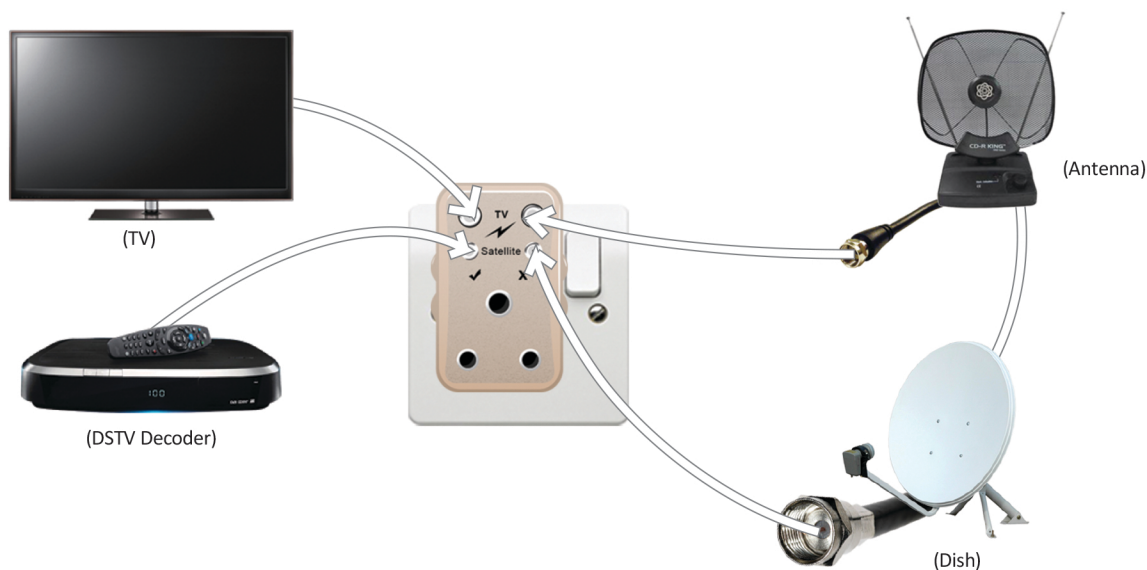

TV & SAT

